

# Dhabi II

## Additional information please contact:

Borr Drilling Management DMCC  
 Level 28 Reef Tower, Cluster O  
 P.O. Box 36913  
 Jumeirah Lakes Towers, Dubai United Arab Emirates  
 +971-04-4487501  
 marketing@borrdrilling.com - www.borrdrilling.com

## Standard Specification Jack-up

### General Description

**Design / Generation** ..... BMC 150  
**Constructing Shipyard** ..... Promet Shipyard, Singapore  
**Year Entered Service / Significant Upgrades** ..... 1981  
**Classification**..... ABS,A1, Self-Elevating Drilling Unit  
**Flag** ..... Liberia  
**Overall Dimensions**.....151 ft.long x 156 ft.wide x 18 ft deep  
**Legs** ..... (3) 217 ft. long, Cylindrical  
**Drafts** .....12 ft at loadline  
**Accommodation** ..... 88 persons  
**Displacement**.....14520 kips  
**Variable Deck**.....2709 kips/4951kips(50/150 ft WD) operating/ 3274 kips afloat  
**Transit Speed** ..... up to 4 knots, @ 9,000 hp sea tug  
**Operating Water Depth** ..... 160 ft. designed / 120 ft. outfitted  
**Maximum Drilling Depth** ..... 20,000ft

### Drilling Equipment

**Derrick** Dreco; 160 ft high with 30 ft x 30 ft base  
**Hookload Capacity** 1,000,000 lbs gross nominal capacity  
**Cantilever/ Drill floor** 40 ft / 10 ft Port & Stbd  
**Drawworks** Continental Emsco C2 Type II Max hook load 1,000 kips with 12 lines. (2) x EMD-D79 MB6 motors suitable for 1-3/8" drill lines.  
**Rotary Table** National 37.5" table opening, electric drive, rated 650 mt  
**Top Drive** Varco TDS-3 Electric 350 mt  
**Mud Pumps** (2) Continental Emsco FB 1600 pumps, each driven by 1,000 hp (2x EMD motor) 5,000 psi rated

### Power & Machinery

**Main Power** (4) Caterpillar D399 diesel engines rated at 1,215hp each with KATO generator rated to 1,500kVA  
**Emergency Power** (1) Caterpillar D399 diesel engine rated at 1,215hp with KATO generator rated to 1,333kVA

### Storage Capacities

**Fuel Oil**..... 2,162 bbls  
**Liquid Mud**..... 1,575 bbls  
**Drill Water** ..... 6,156 bbls  
**Potable Water** ..... 2,052 bbls  
**Bulk Material** ..... (mud + cement) 8000 cu-ft  
**Sack Storage** ..... 5,000 sacks

### BOP & Well Control Equipment

**BOP Rams** (1) Cameron Single "U" rams 13-5/8" 10k psi BOP  
**BOP Rams** (1) Cameron Double "U" rams 13-5/8" 10k psi BOP  
**BOP Annular** (1) Hydril GK 13-5/8" 5k psi annular preventer  
**BOP Handling** (2) Ingersoll Rand hoists, rated 37.5 mt  
**Diverter** 1) Hydril MSP 2000 21-1/4" 2k psi annular preventer with  
 (2) 12" outlet lines

### Mooring Equipment

**Mooring Winches** (4) BMC 6020 electric winches rated at 50,000 lbs pull  
**Anchor Lines** (4) 1-1/4" Wire rope

### Cranes

**Cranes** (1) BMC1600D crane, 51st capacity,100ft boom  
 (1) BMC 900 crane, 25st capacity,100ft boom



### Special Features & Other Information

**Helideck** Rated for AW189 helicopters. (8.6mt) – CAAP 71 2016 Revision



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

# Dhabi II

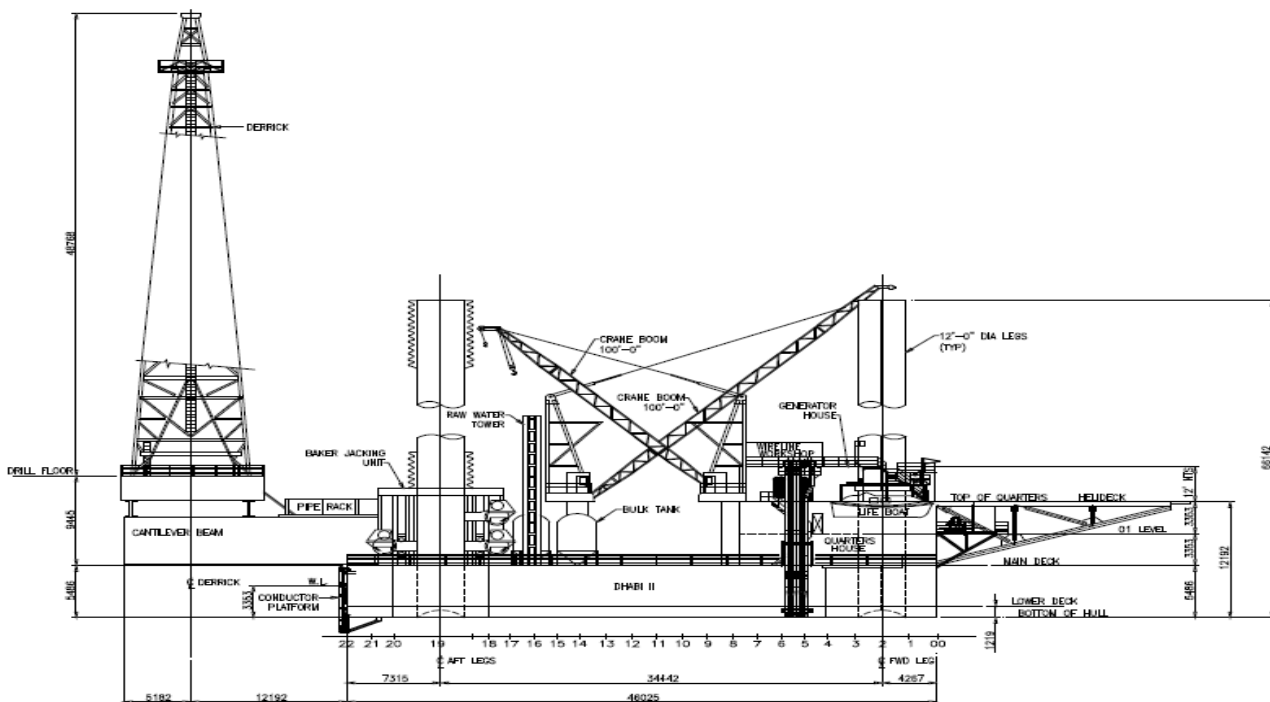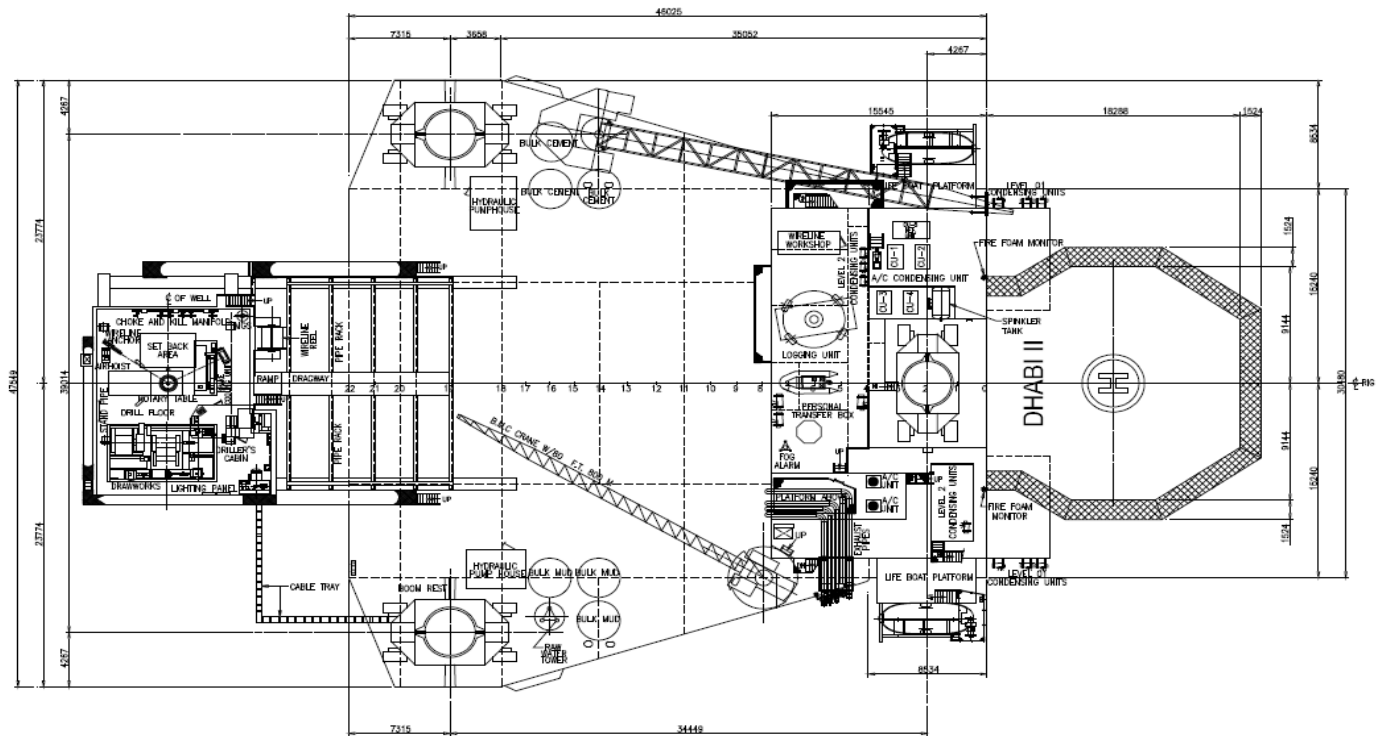

These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.