

Arabia III

Additional information please contact:

Borr Drilling Limited
 E. Pearman Building, 2nd Floor
 9 Par-la-Ville Road,
 Hamilton HM11, Bermuda

marketing@borrdrilling.com - www.borrdrilling.com

High Specification Jackup

General Description

Design / Generation KFELS Super A
Constructing ShipyardKeppel KFELS Singapore
Year Entered Service / Significant Upgrades..... 2013 / 2023
Classification......ABS, A1 Self-Elevating Drilling Unit
Flag.....Liberia
Overall Dimensions 246ft (L) x 232ft (W) x 31ft (D)
Legs.....3 x 525ft
Drafts.....22ft
Accommodation.....150 berths ILO 92; or 120 berths ILO 133
Displacement.....51816 Kips
Variable Deck.....8,208 kips Operating, 9,105 kips storm operating/ 5,905 kips transit
Transit Speed.....up to 5 knots, @ 150st bollard pull
Operating Water Depth..... 400ft
Maximum Drilling Depth..... 35,000ft

Drilling Equipment

Derrick NOV SSBN, 170ft. high, with 40ft long, 40ft base.
Hookload Capacity 2,000,000 lbs.
Cantilever 75 feet / 15ft Port & 15ft Stbd
Drawworks NOV ADS-10Q, 4,600 hp w/ 2" Drill.
Rotary Table NOV 495, 49-1/2"
Top Drive NOV TDS-1000
Tubular Handling Cameron SmartCat
Iron Roughneck ST-160
Mud Pumps (3) NOV 14-P-2200 w/ 7,500 psi capability
Solids Control (5) NOV VSM-300 shakers

Power & Machinery

Main Power (6) Caterpillar 3516C diesel engines rated at 2,150hp at 1200rpm each with Kato generator rated to 1,500 KVA
Emergency Power (1) Caterpillar 3508B, rated at 1298 hp @ 1800 rpm with Stamford HCM634K2 generator rated at 910 kw

Storage Capacities

Fuel Oil 4,681 bbls
Liquid Mud5,586 bbls
Base Oil 1,476 bbls
Brine 1,728 bbls
Drill Water 19,667 bbls
Potable Water 3,543 bbls
Bulk Material..... (mud + cement) 17,600 cu ft
Sack Storage.....5,000 sacks

BOP & Well Control Equipment

BOP Rams (2) Cameron double ram 13-5/8 in 10K psi
BOP Annular (1) Hydril GX 13-5/8 in 10K psi Annular
BOP Handling (2) J.D.Neuhaus EHZ 100 hoists rated to 100 mt each
Diverter DriLQuip 49-1/2", Big Bore – 500psi

Mooring Equipment

Mooring Winch (1) Cargotec electric winches rated to 46 mt. Holding brake rated to 159mt.
Wire 2,000ft x 2" galvanized wire rope
Anchor (1) Bruce anchors (7mt)

Cranes


Deck Cranes (3) Seatrax cranes rated to 63.7mt (Port), 61mt (Starboard & 64.4mt (Port Aft). (2) cranes with 120ft booms & (1) with 140ft boom
Pipe Handling Crane 1 X Outreach PKM700T knuckle boom crane with an 80ft boom, 7,716 lbs. at 40ft radius, starboard side of the cantilever

Special Features & Other Information

Helideck Rated for: S-92 and S-61N
Work Offline (WO) NOV SBBC 20,000 lbs., (SWL)



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

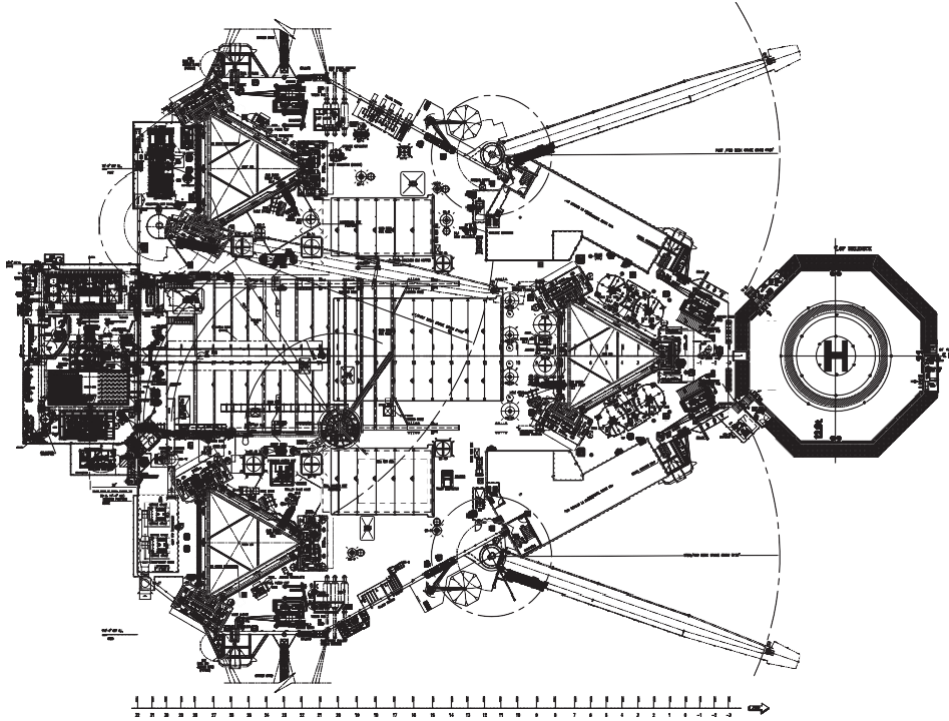

MAIN DECK ARRANGEMENT

