

Dhabi II

Additional information please contact:

Borr Drilling Limited
 E. Pearman Building, 2nd Floor
 9 Par-la-Ville Road,
 Hamilton HM11, Bermuda

marketing@borrdrilling.com - www.borrdrilling.com

Standard Specification Jack-up

General Description

Design / GenerationBMC 150
Constructing ShipyardPromet Shipyard, Singapore
Year Entered Service / Significant Upgrades1981
ClassificationABS,A1, Self-Elevating Drilling Unit
Flag.....Liberia
Overall Dimensions 151 ft.long x 156 ft.wide x 18 ft deep
Legs.....(3) 217 ft. long, Cylindrical
Drafts 12 ft at loadline
Accommodation 88 persons
Displacement..... 14520 kips
Variable Deck2709 kips/4951kips(50/150 ft WD) operating/ 3274 kips afloat
Transit Speedup to 4 knots, @ 9,000 hp sea tug
Operating Water Depth..... 160 ft. designed / 120 ft.outfitted
Maximum Drilling Depth..... 20,000ft

Drilling Equipment

Derrick Dreco; 160 ft high with 30 ft x 30 ft base
Hookload Capacity 1,000,000 lbs gross nominal capacity
Cantilever/ Drill floor 40 ft / 10 ft Port & Stbd
Drawworks Continental Emsco C2 Type II Max hook load 1,000 kips with 12 lines. (2) x EMD-D79 MB6 motors suitable for 1-3/8" drill lines.
Rotary Table National 37.5" table opening, electric drive, rated 650 mt
Top Drive Varco TDS-3 Electric 350 mt
Mud Pumps (2) Continental Emsco FB 1600 pumps, each driven by 1,000 hp (2x EMD motor) 5,000 psi rated

Power & Machinery

Main Power (4) Caterpillar D399 diesel engines rated at 1,215hp each with KATO generator rated to 1,500kVA
Emergency Power (1) Caterpillar D399 diesel engine rated at 1,215hp with KATO generator rated to 1,333kVA

Storage Capacities

Fuel Oil 2,162 bbls
Liquid Mud 1,575 bbls
Drill Water 6,156 bbls
Potable Water 2,052 bbls
Bulk Material (mud + cement) 8000 cu-ft
Sack Storage 5,000 sacks

BOP & Well Control Equipment

BOP Rams (1) Cameron Single "U" rams 13-5/8" 10k psi BOP
BOP Rams (1) Cameron Double "U" rams 13-5/8" 10k psi BOP
BOP Annular (1) Hydril GK 13-5/8" 5k psi annularpreventer
BOP Handling (2) Ingersoll Rand hoists, rated 37.5 mt
Diverter 1) Hydril MSP 2000 21-1/4" 2k psi annular preventer with (2) 12" outlet lines

Mooring Equipment

Mooring Winches (4) BMC 6020 electric winches rated at 50,000 lbs pull
Anchor Lines (4) 1-1/4" Wire rope

Cranes

Cranes (1) BMC1600D crane, 51st capacity,100ft boom
 (1) BMC 900 crane, 25st capacity,100ft boom



Special Features & Other Information

Helideck Rated for AW189 helicopters. (8.6mt) – CAAP 71 2016 Revision



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

Dhabi II

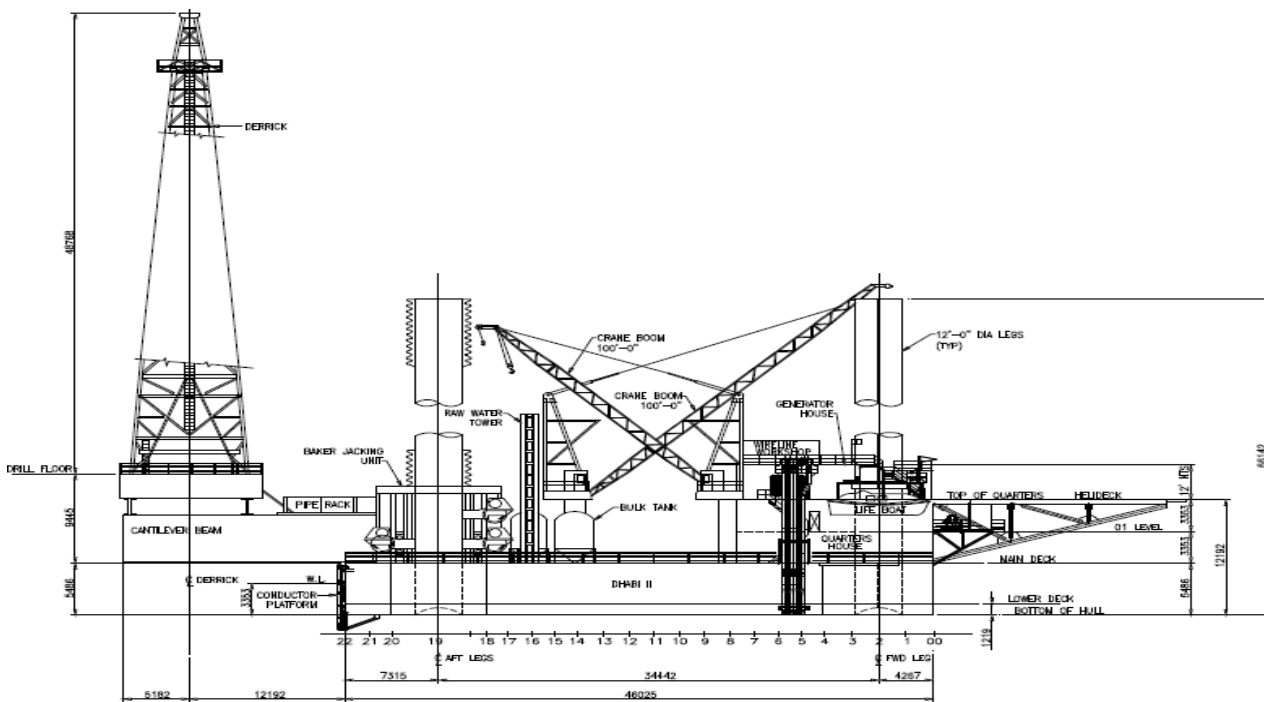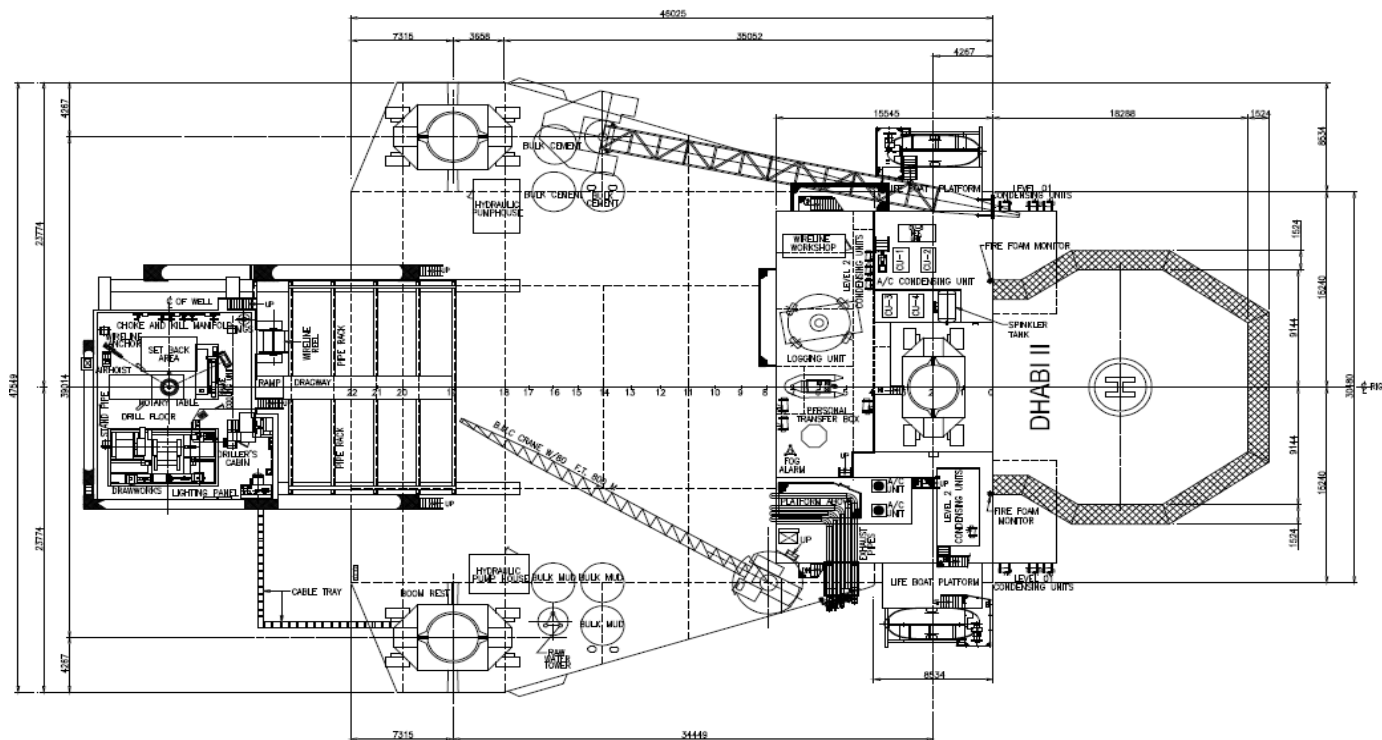

These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.