# Gerd

### Additional information please contact:

Borr Drilling Limited E. Pearman Building, 2<sup>nd</sup> Floor 9 Par-la-Ville Road, Hamilton HM11, Bermuda

marketing@borrdrilling.com - www.borrdrilling.com

**Storage Capacities** 

## **High Specification Jackup**

### **General Description**

Design / Generation	PPL Pacific Class 400
Constructing Shipyard	PPL Shipyard PTE Ltd., Singapore
Year Entered Service / Significant Upgrad	<b>les</b> 2018
Classification	ABS-A1, Self-Elevating Drilling Unit
Flag	Vanuatu
Overall Dimensions	236.5 ft.long x 224.4 ft.wide x 27.9 ft deep
Legs	(3) 532 ft. long, Triangular
Drafts	
Accommodation	
Displacement	
Variable Deck7,498 kips op	erating / 4,998 kips transit (spud cans full)
Transit Speed	up to 4 knots, @ 150st bollard pull
Operating Water Depth	
Maximum Drilling Depth	

### **Drilling Equipment**

Derrick	NOV Derrick 160ft. high, with 35ft. x 35ft. base
Hookload Capacity	1,500,000lbs gross nominal capacity
Cantilever/ Drill floor	75 ft / 15 ft Port & Stbd
Drawworks	NOV ADS-10T driven by (3) Baylor electric motors. Rated to 750st with 14 lines of 1-5/8" drill line
Rotary Table	National Oilwell D-495 49-1/2" with a rated capacity of 1000st
Top Drive	NOV TDS-8SA Hoisting cap: 750 s-ton, AC motor: 1150 hp, intermittent torque: 100,000 ft-lbs, drilling torque: 65,500 ft-lbs, speed 270 rpm, (2) IBOP 3 1/6" – 15k
Tubular Handling	NOV HT 100 rotary rig tongs and (1) NOV ST120 Iron Roughneck. 3 1/2" to 10" tubulars
Mud Pumps	(3) NOV 14-P-220 triplex pumps (9 inch bore and 14 inch stroke), each driven by 1,229 hp (NOV Baylor AC motor) 7,500 psi rated
HP Mud System	Rated for 7,500psi
Solids Control	(4) NOV Brandt VSM 300 shaleshakers. Mud cleaner installed over one shale shaker.
	Power & Machinery
Main Power	(5) Caterpillar 3516C-HD diesel engines rated at 2,150hp at 1200rpm each with Kato generator rated to 2,150KVA


# **Emergency Power** (1) Caterpillar 3508B DITA diesel engine rated at 1,298hp at 1,800rpm with Leroy Somer generator rated to 1020KVA

Fuel Oil		
Liquid Mud	4,170 bbls	
Base Oil		
Brine		
Drill Water		
Potable Water		
Bulk Material		
Sack Storage	5,000 sacks	
BOP & Well Control Equipment		
BOP Rams	(2) Cameron double rams 18-3/4" 15k psi BOP	
BOP Annular	(1) Cameron 18-3/4" 10,000psi annular preventer	
BOP Handling	(4) J D Neuhaus EH-75 BOP main hoists, rated 75mt each	
Diverter	Vetco KFDJ 500, 49-1/2" diverter rated to 500psi with (1) 16" flow line, (2) 12" overboard, (1) 6" deluge and (1) 3" fill line	
Mooring Equipment		
M	(4) Marter da ala stria sina bas ante di st 04 est anna situ	
Mooring Winches	<ul><li>(4) Mentrade electric winches rated at 31mt capacity</li><li>63.5 mt brake holding</li></ul>	
Anchor Lines	3000ft x 1-1/2" galvanized wire rope	
Anchors	(4) Flipper Delta anchor	
Cranes		
Cranes	(3) Baker Marine cranes, 50mt capacity,120ft boom	
Special Features & Other Information		
СТИ	TSC 225mt Vertical Load and 25mt Lateral Load - hydraulic driven @ 4.66 m and 10.66 m from AFT transom	
RPD System	Yes	
Helideck	Rated for Sikorsky S-61 and S-92 helicopters. CAP 437	
Offline Systems:		
Iron Roughneck	(1) NOV-ST100 Iron Roughneck. 3 1/2" to 9-3/4" tubulars	
MPC	FORUM MPC (Multi-Purpose Crane) of 6,000 lbs SWL at all radii, crane boom end is adapted for mounting of a 280-kg man-basket	
OA Crane	OAC (Offline Activity Crane) Forum 10mt derrick mounted for offline pipe handling	

for offline pipe handling



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

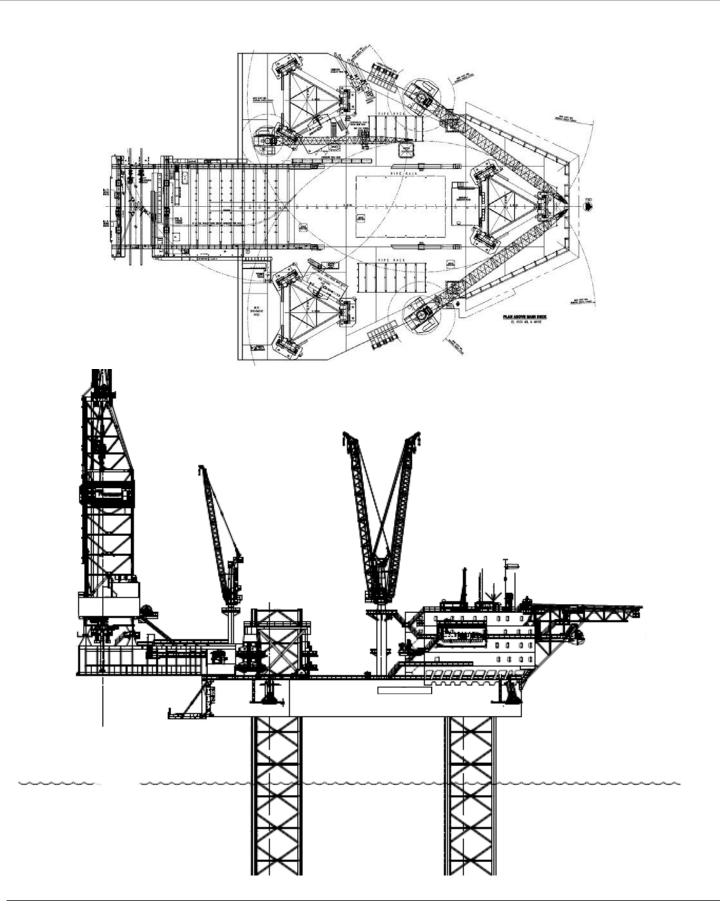



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with Borr Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.